

NO WATER PRESSURE LIMIT INTELLIGENT

smart toilet



AUTO OPEN/CLOSE AUTO FLUSHING

Sensitive sensing





FOOT SENSOR OPEN/FLUSH

Easier for men to free their hands



FOOT SENSOR FLUSH



Manually Flip



Standing Position Using



Foot Sensor Flush



Manually Flip



Sitting Position Using



Automatic Flush
Off Seat

RADAR SENSOR COVER OPENING



Automatic Flip
When Approached



Foot Sensor
Ring Opening



Standing
Position Using



Automatic Flush
& Close Off seat



Automatic Flip
When Approached



Sitting Position
Using



Automatic Flush
Off Seat



Close Off seat
Off Seat

SEVEN PROTECTIONS

Ensure the safety of using a smart toilet with full protections



IPX4
Waterproof



Earth Leakage
Protection



Power-off
Protection



Circuit
Protection



Water Temp
Protection



Seat Temp
Protection



Over Heating
prevention

MORE FUNCTION DETAILS

More caring, more satisfied



TOILET SEAT

Sit comfortably



LED SCREEN

Function display

WITH WATER TANK NO WATER TANK

TANKLESS

Need to measure water pressure



WATER TANK

No water pressure measurement

S-Trap




P-Trap



INSTRUCTIONS

Dimensional specification

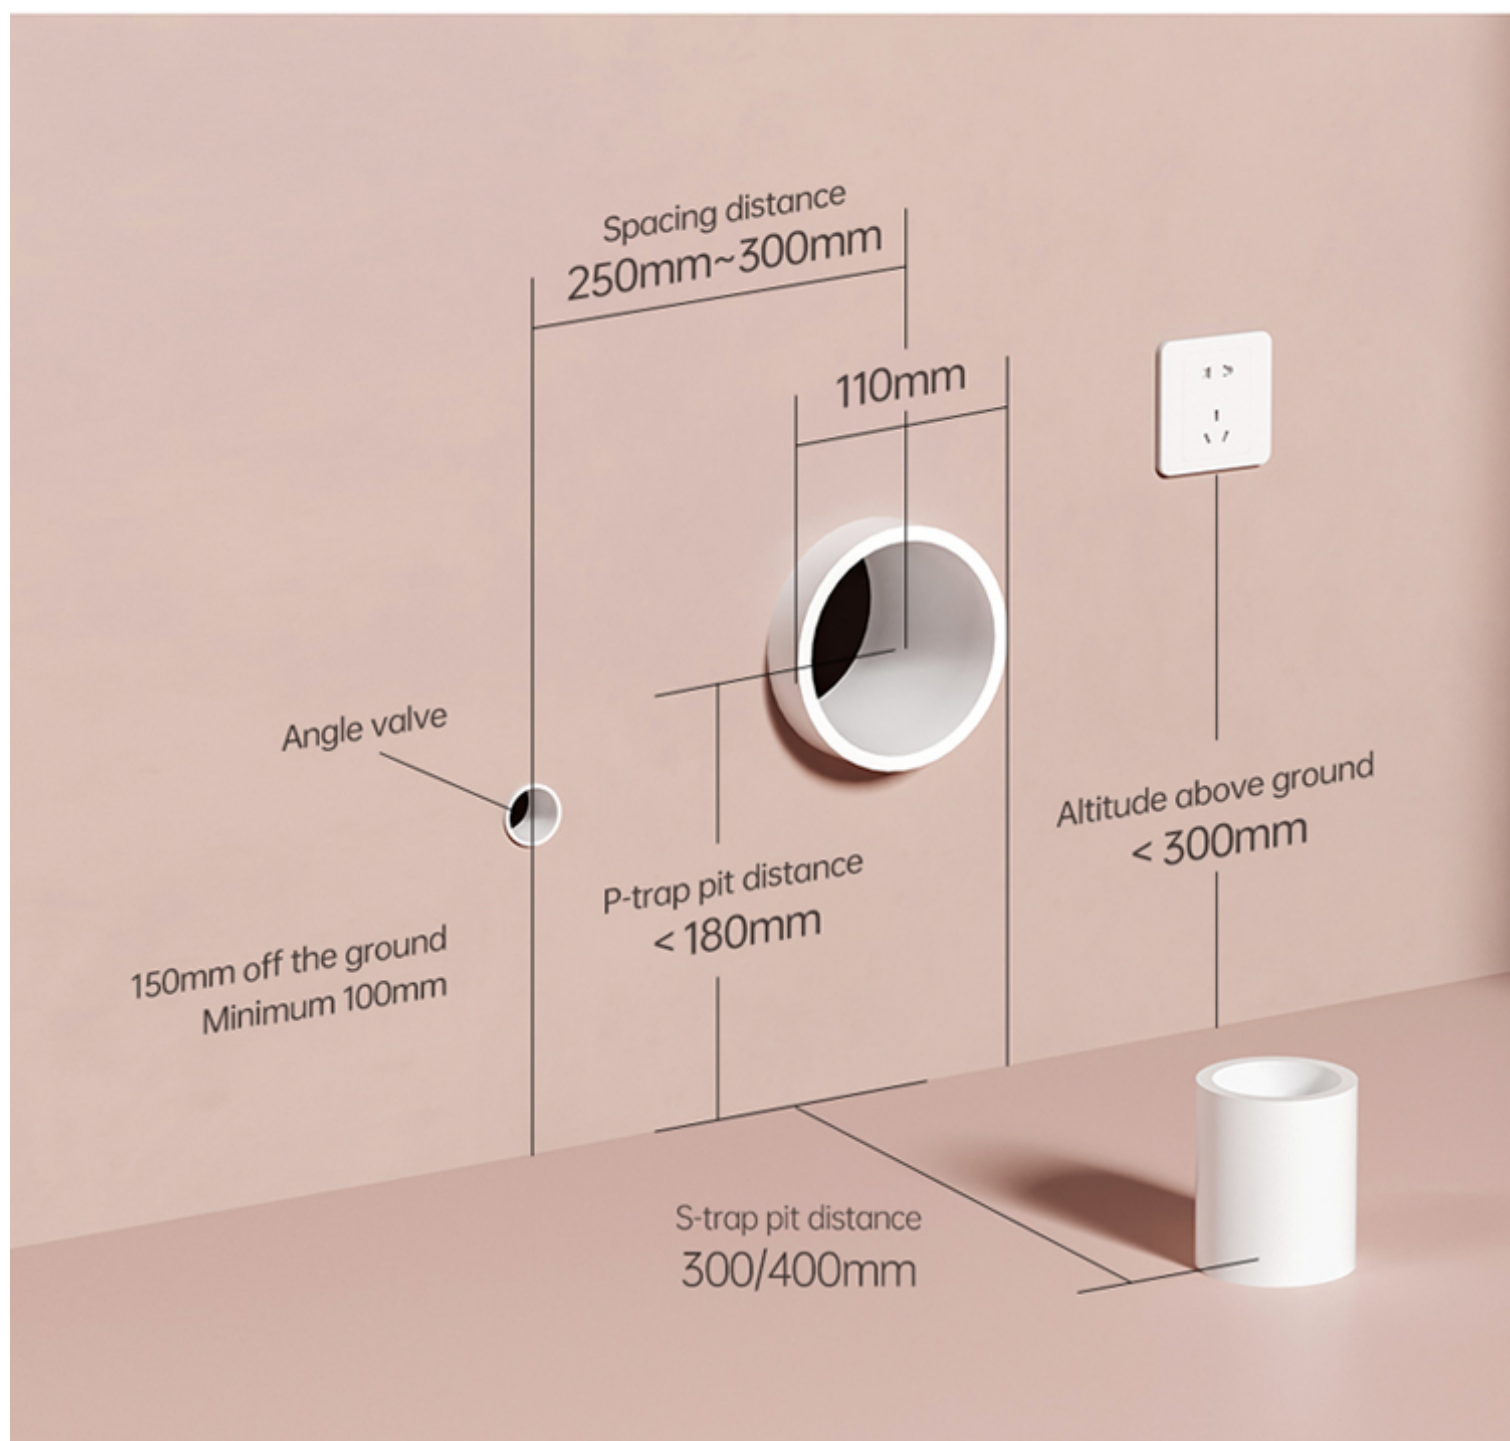

CORE SELLING POINT

Experience upgrade



units:mm



p-trap



S-trap


Smart toilet installation

Before installation, open the Angle valve to drain water for 1-2 minutes and clear the embedded water pipe. Impurities and sludge to avoid clogging affect the cleaning function of the smart toilet

ADJUSTABLE WALL DRAIN




INSTALLATION EXAMPLE

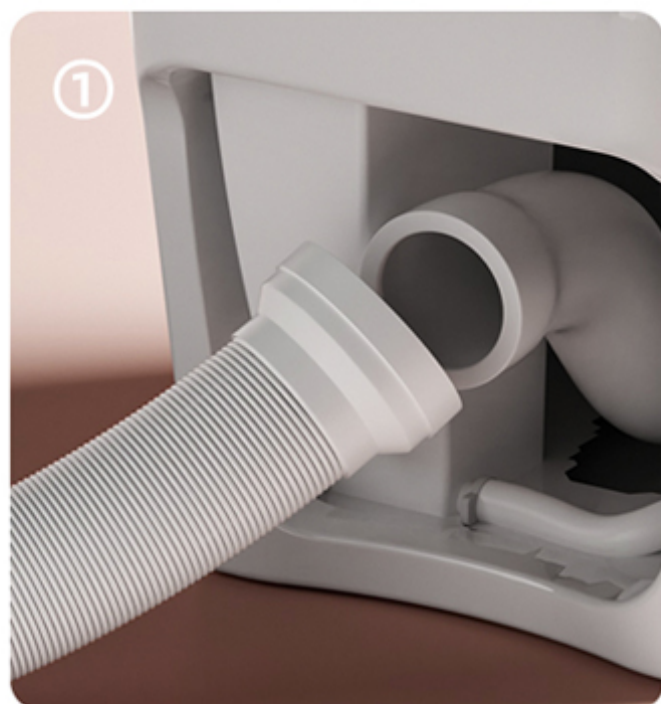

① The sealing ring of the white joint, after gluing, covers the toilet drain.



② With the other end glued, Put into the wall drain, glue smooth.

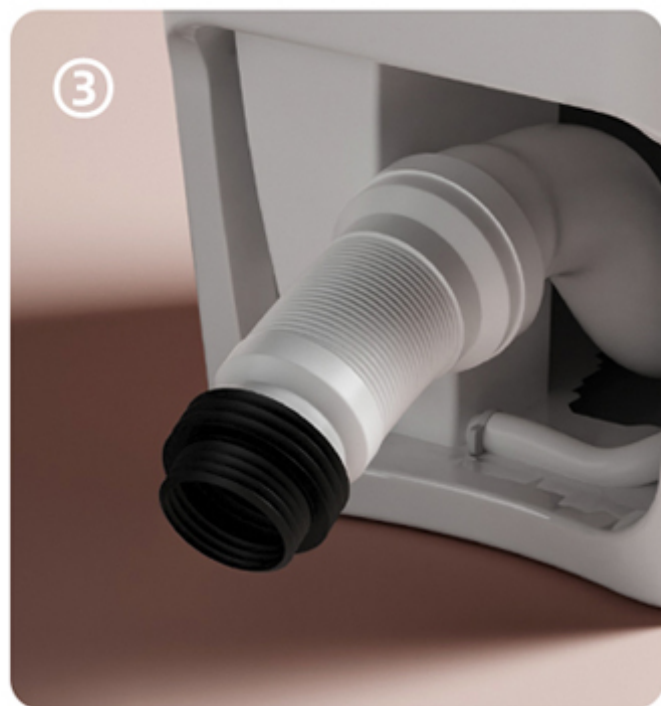

③ After the blowdown line is installed, Glue both ends and secure.



④ The wall row smart toilet is installed.

SMART TOILET

information

Voltage

AC220V/50Hz

Flush way

Siphon Jet Flushing

Rated voltage

1150W

Drainage way

S-trap / P-trap

Pit distance

S-trap: 200-450mm P-trap: 180mm

Product size

680*400*470mm

Waterproof grade

IPX4 grade

Wire length

1.5m

Weight

48KG

Package size

780*480*575mm

Seat temperature

4 Levels adjustable

Seat temperature

4 Levels adjustable

Warm air drying

4 Levels adjustable


(Measured by hand may have size tolerance
Please refer to the actual product.)



INDEPENDENT WATER TANK

High building low water pressure
can also be easily cleaned.



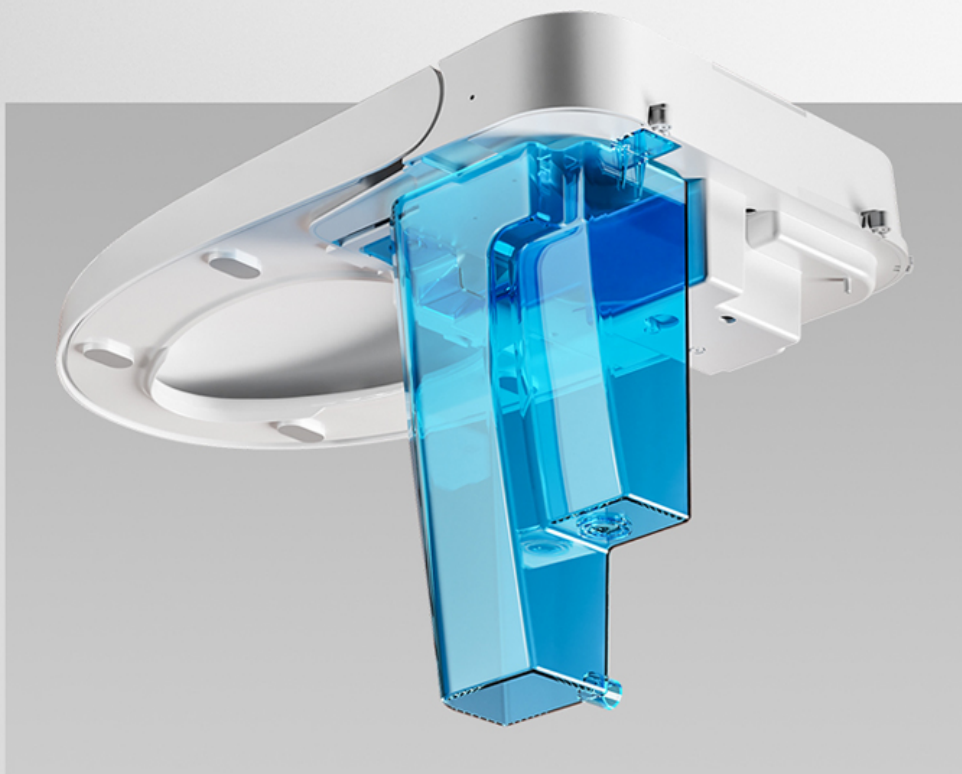

BUILT IN WATER TANK

no water pressure limit

4.8L



POWERFUL BOOSTER PUMP

Intelligent water pressure regulation

INSTANT HEATING WATER

Constant temperature cleaning



Adjustable water temperature



SEAT HEATED

Can adjust to a certain temperature
which you fell comfortable



Adjustable seat temperature




WARM AIR DRYING

Can be adjust the temperature
to fit your body feeling



Adjustable air temperature

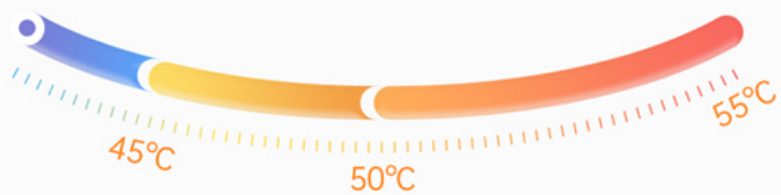

DOUBLE WATERWAY DESIGN





Rear Wash



Child Wash



Female Wash



Rear Massage